

15mm PE Swing Door

Manufactured in white polyethylene; 15mm leaf

Doors for working areas



Polyethylene swing door, available in single or double leaf, suitable for corridors and production areas. 180° self-closing hinges with stainless steel springs and optional "hold-open" function.

15mm polyethylene leaf in white as standard with other colour options available at additional cost.

Available extras: Stainless steel teardrop bumpers, 8mm polyethylene protection, swing door lock.



GRUPO
repro




Standard T5-treated anodised aluminium frame with 15 micron stainless steel finish, also available in any RAL colour or stainless steel. Either clamp frame to suit panel thickness or fixed frame for brickwork installation. The frame can also be adapted to suit meat rail hanging systems.

Manufactured with 350mm x 450mm oval vision panel with 4mm metacrilate glazing and grey gasket surround, as standard.



www.blusealdoors.co.uk

REPRO GROUP reserves the right to modify its products for improvement.

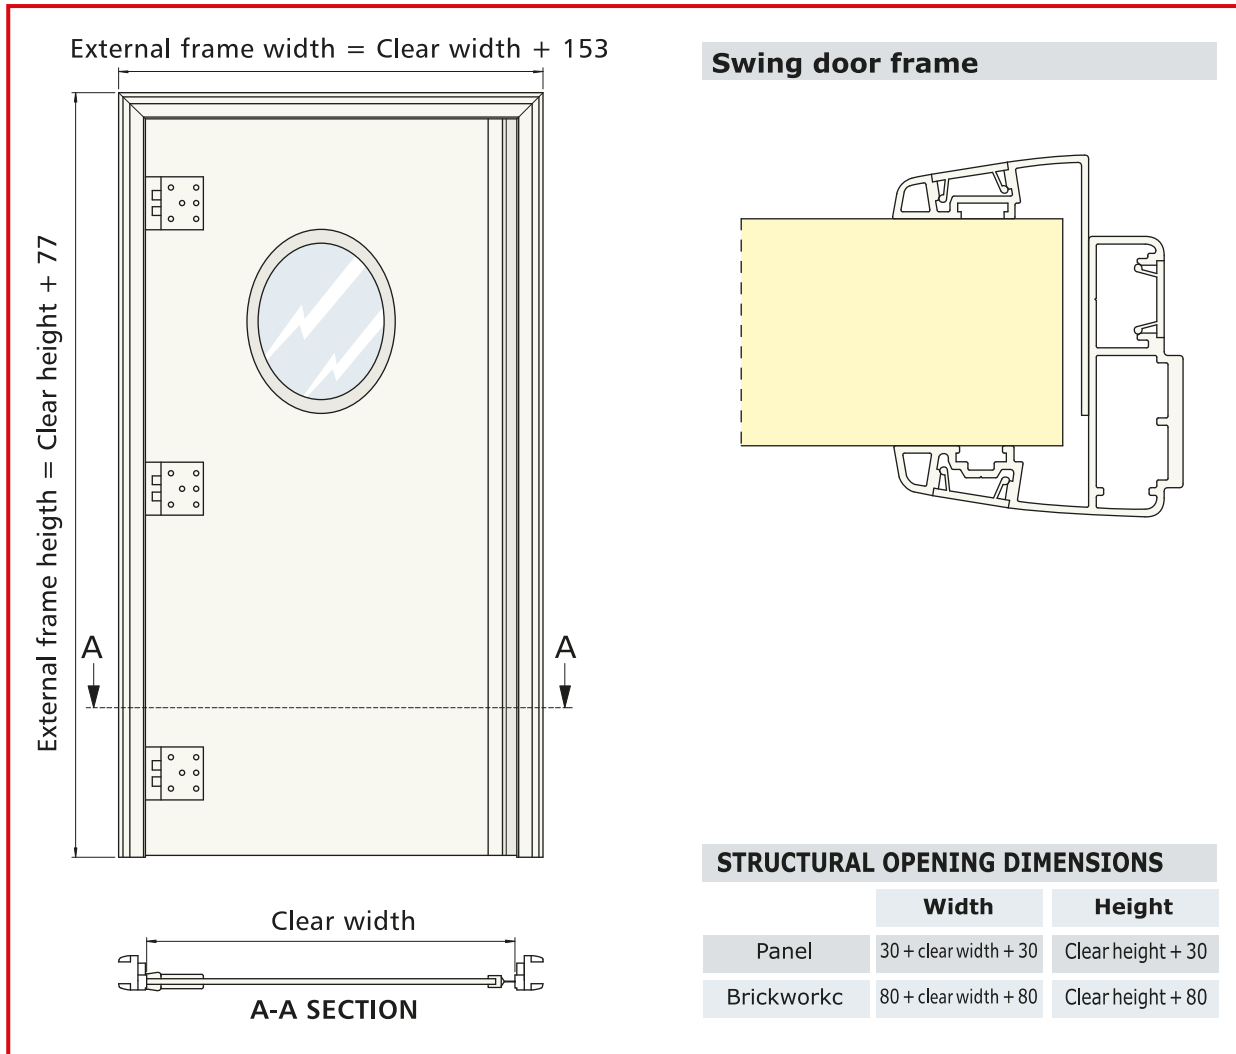

15mm Polyethylene Swing Door Specification:

- Excellent physical characteristics for applications where chemical resistance and impact strength are important.
- Lightweight leaf, ideal for dividing production areas, etc.
- 15mm white polyethylene (also available in a range of other colours)
- Hinges designed by REPRO with AISI-304 stainless steel mechanism.
- 180° swing with optional 90° "hold-open" function.
- Frame manufactured in 6063 aluminium alloy. T5-treated anodised aluminium with 15 micron stainless steel finish.

Optional Extras:

- Swing door lock
- 8mm polyethylene protection
- Stainless steel teardrop bumpers



www.blusealdoors.co.uk



GRUPO repro



GRUPO repro