

Personnel Swing door

Injected, with 40 mm leaf thickness

Doors for working areas



Personnel swing door, available in single or double leaf, suitable for corridors and production areas. 180° self-closing hinges with stainless steel springs and optional "hold-open" function.

The leaf finish is available in a range of RAL colours, PVC coated steel or stainless steel. T5-treated anodised aluminium leaf surround.



GRUPO
repro




Standard T5-treated anodised aluminium frame with 15 micron stainless steel finish, also available in any RAL colour or stainless steel. Either clamp frame to suit panel thickness or fixed frame for brickwork installation.

Manufactured with 350mm x 450mm oval vision panel with 4mm metacrilate glazing and grey gasket surround, as standard.

Available extras: Stainless steel teardrop bumpers, 8mm polyethylene protection, swing door lock.



www.bluseal.co.uk

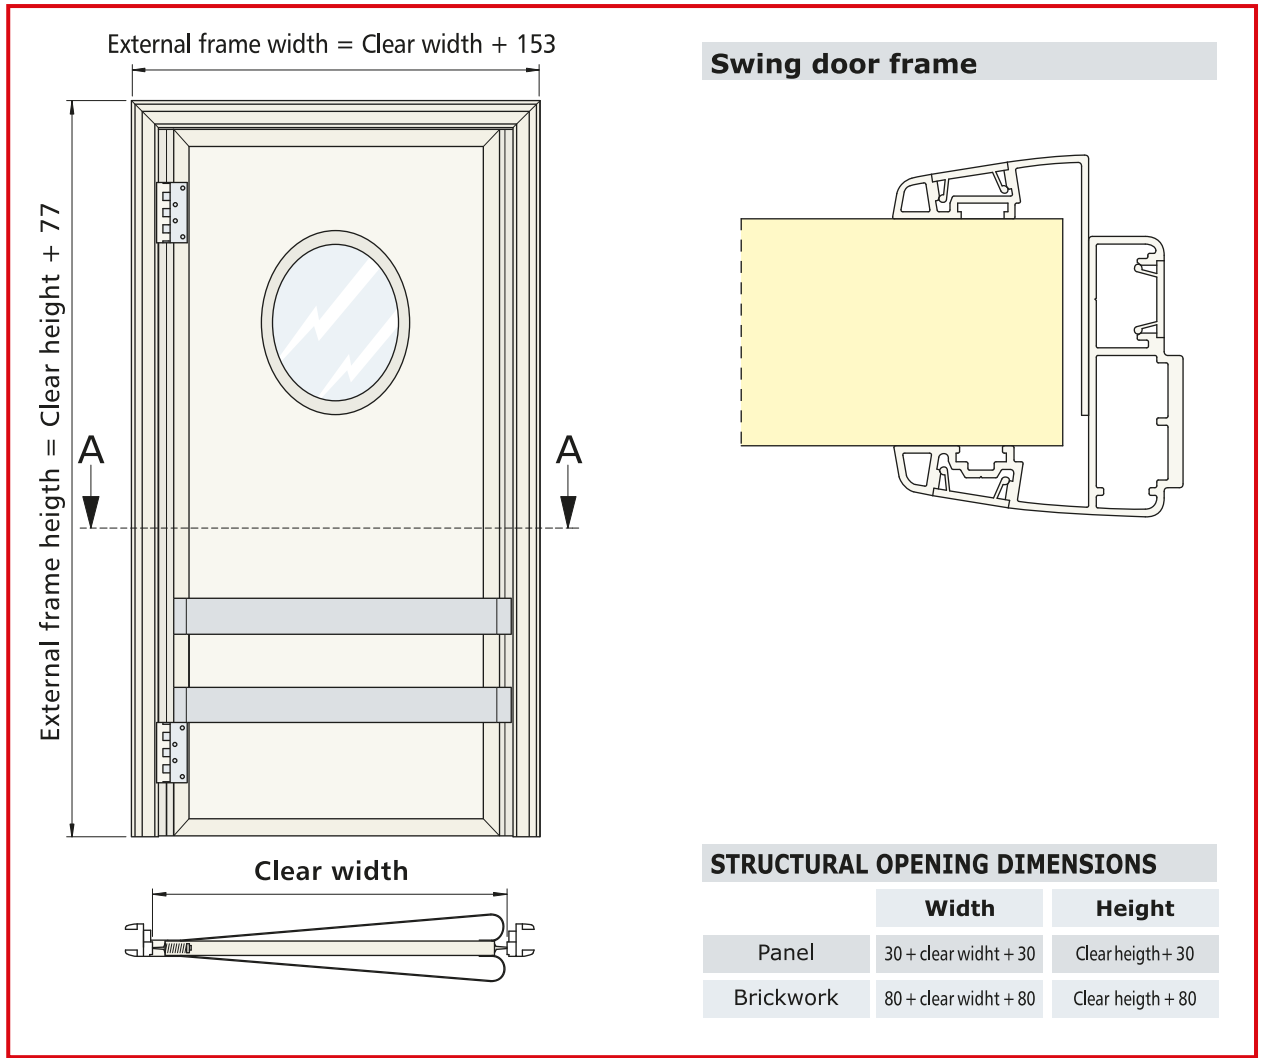

40mm Personnel Swing Door Specification:

- The leaf finish is available in a range of RAL colours, PVC coated steel or stainless steel.
- Injected polyurethane insulation with a conductivity coefficient of 0.022 w/m*°C.
- Polyurethane density of 40-45 kg/m3.
- Hinges designed by REPRO with AISI-304 stainless steel mechanism.
- 180° swing with optional 90° "hold-open" function.
- Frame manufactured in 6063 aluminium alloy. T5-treated anodised aluminium with 15 micron stainless steel finish.

Optional Extras:

- Swing door lock
- 8mm polyethylene protection
- Stainless steel or 5-bar aluminium kickplates
- Stainless steel teardrop bumpers



GRUPO repro



GRUPO repro