

Automatic SCR Sliding System

For SCR & SCR Lite sliding doors

Complementary systems



The Repro Automatic SCR sliding system has been designed specifically for the SCR & SCR Lite sliding tracks. It is available with a range of safety features including photocell technology.

The control panel has "fully open" and "partially open" push buttons so that air loss from the coldstore can be minimised for personnel traffic. There are a number of adjustable parameters on the display which can be changed by the user so that the door can be set-up to suit each application.



GRUPO
repro




The motor and control panel are easy to install and we can offer a "wire & commission" service where required.

We have a working display of the automatic SCR sliding door at our premises, so please contact the office to arrange a visit.



www.bluseal.co.uk

Abmessungen: Measurements

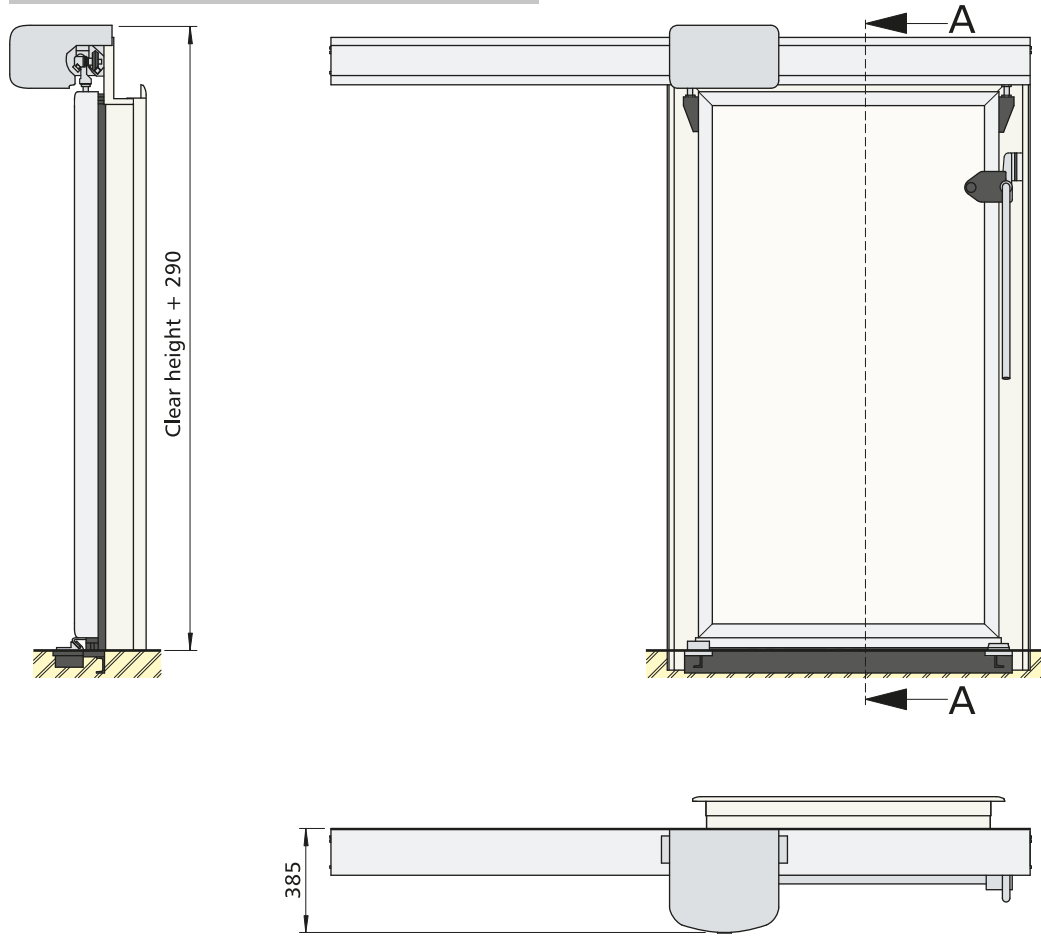

Technical Specification

Motor

- Single Phase 240v AC 16A
- Frequency 50Hz
- IP55 rated

Control Panel

- Includes intuitive LED display in several languages
- IP65 rated
- "Partial Opening" & "Fully Open" push buttons
- Emergency Stop
- Warning light and audio alarm
- Programmable parameters including opening speed, closing speed, opening time, closing time, power, heat supply (for freezer application), etc.

Standard Safety Features

- Photocell technology to edge of leaf
- Black nylon protection to edge of leaf
- Audio-visual alarm when door in operation
- "Soft-close" memory function.

Options:

- Pull cord switch
- Radar
- Induction Loop
- Remote Control
- Interlock facility

