



FIRESEAL Fire Rated Insulated Hinged Door

For chill & freezer application

Doors for cold-storage rooms



FIRESEAL Insulated Fire Rated Hinged doors for chill & freezer application are manufactured with stainless steel frame, track & leaf surround.

1-HOUR Insulation & Integrity.

The stainless steel frame, with internal thermal break, is prepared for easy installation onto insulated panel or onto blockwork.




**GRUPO
repro**

The door leaf is manufactured from galvanised steel and completely lined with stainless steel. The leaf core is non-flammable PIR insulation within two sheets of 15mm Plasterboard. The door seals against the frame and floor with non-flammable PVC gaskets.

Special industrial internal and external stainless steel handle.



www.bluseal.co.uk

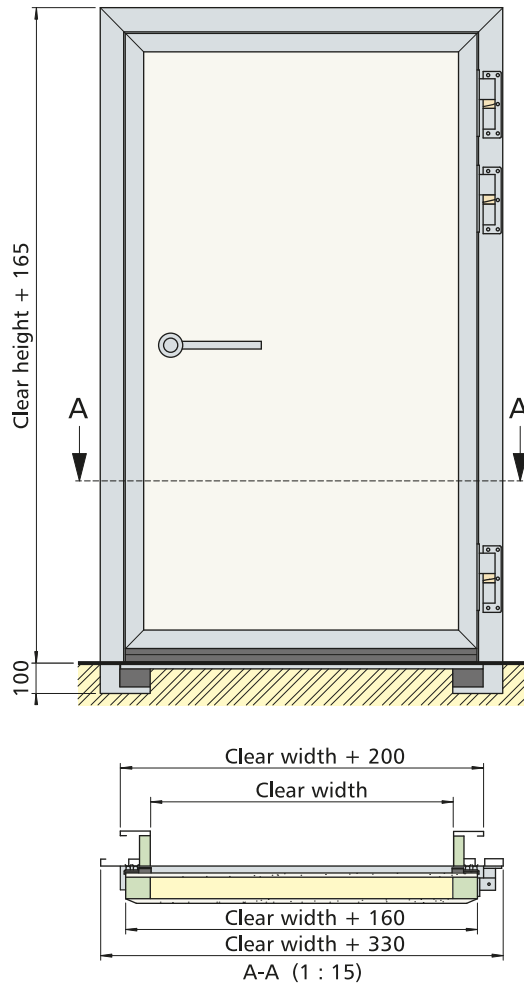

STRUCTURAL OPENING DIMENSIONS

	Width	Height
Panel cut-out	45 + X + 45	Y + 45

FIRESEAL Fire Rated Insulated Hinged Door Specification:

- Leaf finish in PVC coated or painted steel in a range of RAL colours or stainless steel (including circle-polished).
- Surface finish of 0.6mm.
- PIR core material gives sufficient insulation for chill & freezer temperatures.
- 15mm plasterboard behind each face ensures 60-minutes fire resistance.
- The door leaf surround is in stainless steel.
- Each door is custom-made to your dimensions.
- The hinges and lever handle have been designed & manufactured by Repro in stainless steel.
- Ease of installation & maintenance.
- Aesthetic & hygienic design
- Gaskets operate at temperatures of minus 40°C.



External handle



Internal handle

