



Personnel Door

Doors for working areas



Single or double leaf 40 mm personnel door for warehouses, corridors, production areas, offices, toilets, etc. Stainless steel lever handles and hinges as standard.

The leaf finish is available in a range of RAL colours, PVC coated steel or stainless steel. T5-treated anodised aluminium leaf surround.




GRUPO
repro




Standard T5-treated anodised aluminium frame with 15 micron stainless steel finish, also available in any RAL colour or stainless steel. Either clamp frame to suit panel thickness or fixed frame for brickwork installation.



www.bluseal.co.uk

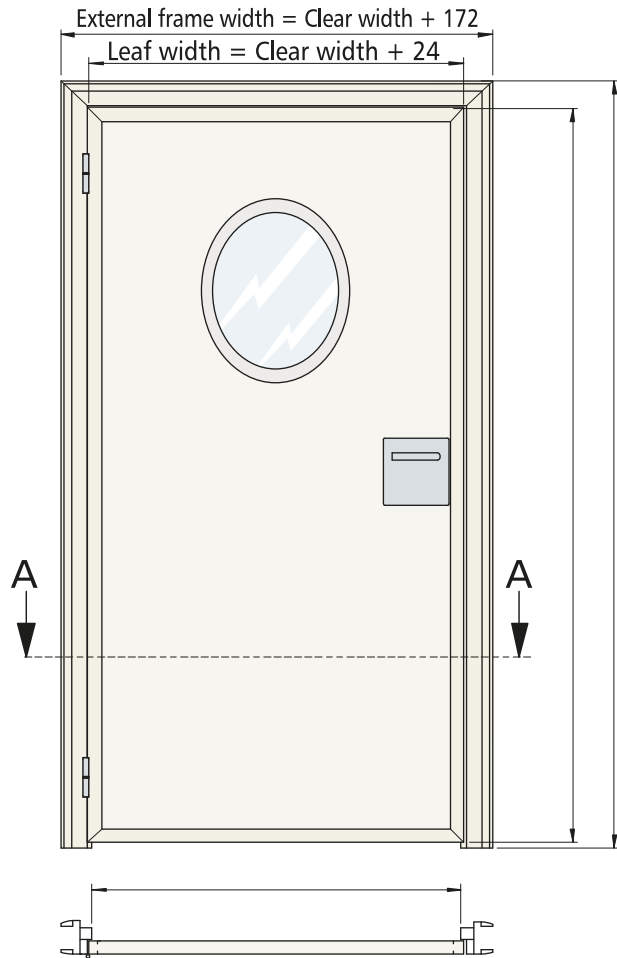

Service Door Frame

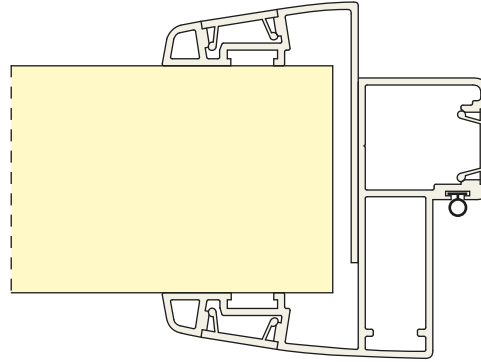

STRUCTURAL OPENING DIMENSIONS

	Width	Height
Panel	40 + Clear width + 40	Clear height + 40
Brickwork	90 + Clear width + 90	Clear height + 90

Standard accessories:

- A wide range of vision panel shapes, styles & finishes including laminated glass or metacrilate glazing including flush fitting vision panels for clean room applications.
- Speed adjustable door closers with a variety of opening functions and finishes.
- Eurocylinder key locks, thumb turn locks, keycode locks, etc
- Push plate & pull handles with roller latch, emergency escape panic furniture, magnetic interlock system including indicator lights.
- Door protection in stainless steel, 5-bar aluminium or 8mm white polyethylene.
- In addition to the above, our doors can be modified to install client/architect specified ironmongery.

Leaf details:

- Dimensions on request
- Leaf finish available in white painted steel RAL9010, PVC, stainless steel, or polyester.
- Injected polyurethane insulation with a conductivity coefficient of 0.022 w/m²°C.
- Polyurethane density of 40-45 kg/m³.
- 0.6mm steel thickness for all finishes except polyester which is 3mm.

Bluseal 
THE SEAL OF APPROVAL



GRUPO
repro



GRUPO
repro